




Part No.	Stationary Applications Maximum Load Kg (Z)	Maximum Recommended Marine Application Load Kg (Z)	Maximum Recommended Thrust Load Newtons (X)
VS4013 N35	35	28	690
VS4013 N45	50	40	980
VS4013 N55	70	55	1375
VS4013 N65	100	80	2000
VS4019 N35	95	80	1900
VS4019 N45	110	90	2150
VS4019 N55	180	145	3530
VS4019 N65	250	200	4900
VS4019 N75	450	360	8830
VS4020 N45	350	280	6900
VS4020 N55	500	400	9800
VS4020 N65	800	640	15700
VS4020 N75	1080	865	21200
VS4074 N40	975	780	19150
VS4074 N50	1450	1160	28500
VS4074 N60	2100	1680	41200
VS4074 N70	3000	2400	59000

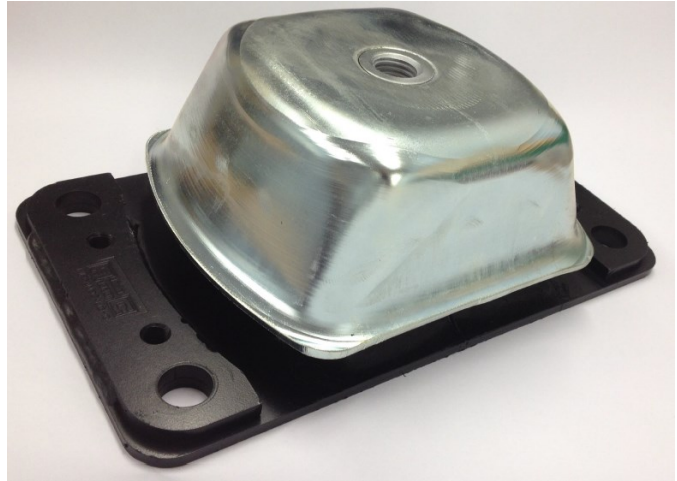