

Description:

Vibracoustics Ltd Vi-Cap Mountings are available in high quality oil resistant rubber. The bonded mount which is supplied in two parts, offers easy installation into a hole drilled through a structure / bracket as shown. The Vi-Cap mounting is captive when installed, providing excellent isolation for mobile, marine and off-road applications.




Typical Applications Include:



- Off-road equipment.
- Military vehicles.
- Transport machinery.
- Construction equipment.
- Agricultural vehicles.
- Industrial mobile machinery.
- Marine applications.

Selection & Installation Details:

Part No.	Structure / Bracket Dimensions (mm)		
	DH	t	r
VS4041	19	9.5	1
VS4012	31.5	14	1.5
VS4014	38.1	22	2.3
VS4040	57.1	28.5	3
VS4042	63.5	32	3

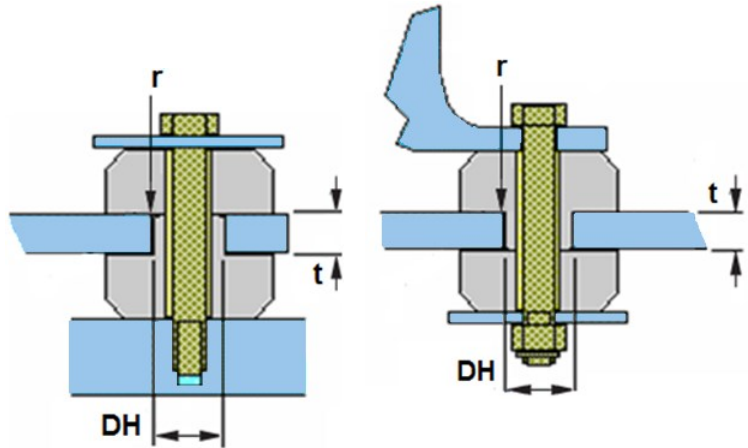

Part No.	Bolt Tightening Torques (Nm)
VS4041	28
VS4012	40
VS4014	100
VS4040	200
VS4042	400

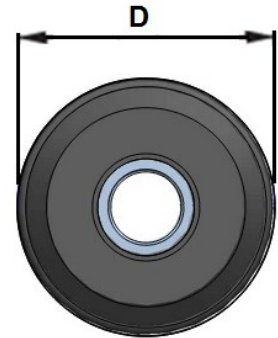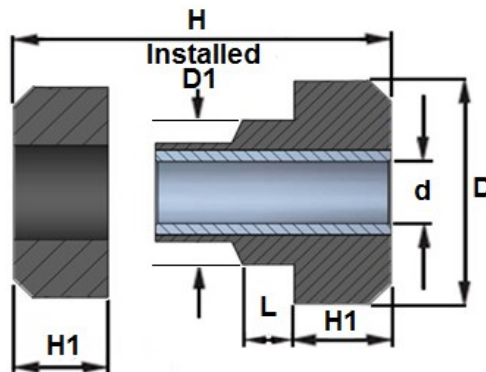

Part No.	Dimensions (mm)						Max Load (Kg)		
	d	D	D1	H1	L	H	C45	C55	C65
VS4041	10.4	33.2	20.1	12.3	9.5	31.7	40	63	113
VS4012	13.5	47.5	31	20	10	49	79	109	172
VS4014	16.5	64	39.5	22.5	15	62	159	222	390
VS4040	24.1	89	58.4	25	22	73.5	231	350	531
VS4042	27	123.9	64.8	31.7	25.5	85.8	877	1172	1609

