


## Description:

Vibracoustics Ltd Tee Bush anti-vibration mountings are designed to provide a simple and compact solution for equipment mounting. Their installation with assembly washers create an integral fully captive fail safe condition with rebound control. The Tee Bush is ideal for both static and mobile applications and is used to reduce structure borne noise and vibration and limit shock movement. A range of sizes and load capacities are available.




## Typical Applications Include:

- Engines.
- Compressors.
- Pumps.
- Gearboxes.
- Radiators.
- Body mounts.

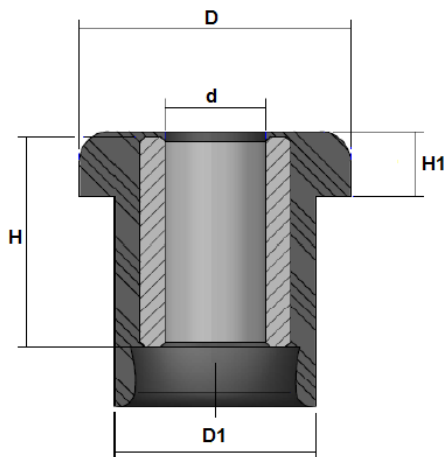

## Installation

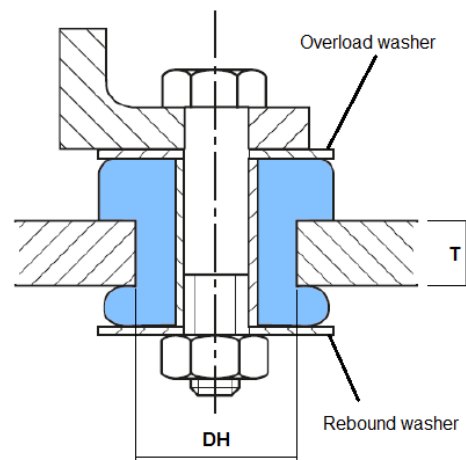

Overload and rebound rubber faces must be fully supported as indicated.

Washers available on request.

| Part No. | Dimensions (mm) |      |      |      |      |      |         |         |               |
|----------|-----------------|------|------|------|------|------|---------|---------|---------------|
|          | D Ø             | H    | d Ø  | D1 Ø | H1   | DH Ø | T (Min) | T (Max) | Max Load (Kg) |
| VS45003  | 27              | 15.5 | 10   | 20   | 6.5  | 19.5 | 5       | 4       | 38            |
| VS45004  | 27              | 21   | 10   | 20   | 6.5  | 19.5 | 11      | 10      | 50            |
| VS45005  | 27.5            | 12.5 | 8    | 19.4 | 7    | 19   | 4       | 3       | 25            |
| VS45006  | 34.5            | 19   | 10.2 | 20.5 | 11.5 | 20.5 | 5       | 3       | 80            |
| VS45007  | 35              | 15.5 | 13   | 27   | 7    | 26.5 | 5       | 4       | 75            |
| VS45008  | 42              | 25   | 13.5 | 31   | 10.5 | 30   | 11      | 10      | 100           |
| VS45009  | 49              | 35   | 13.5 | 34   | 13.5 | 33   | 17      | 16      | 200           |
| VS45010  | 63              | 31.2 | 16.2 | 41   | 16   | 40   | 10      | 9       | 250           |
| VS45011  | 62              | 44.5 | 16.5 | 40   | 17   | 39   | 20      | 19      | 250           |
| VS45012  | 92              | 51.5 | 20.5 | 56   | 26   | 54.5 | 20      | 19      | 1000          |