

VI-FLEX HANGERS


Description:

Vibracoustics Ltd Vi-Flex Ceiling Hangers are designed to use standard Vi-Flex Mountings, producing a unit that is both cost effective and simple to install.

They are maintenance free and offer levels of vibration isolation comparable to that of most spring hangers, with the additional benefit of improved sound isolation at low frequencies.

Typical Applications Include:

- Pipework supports.
- Cable tray supports.
- Ceiling hangers.
- Equipment hangers.

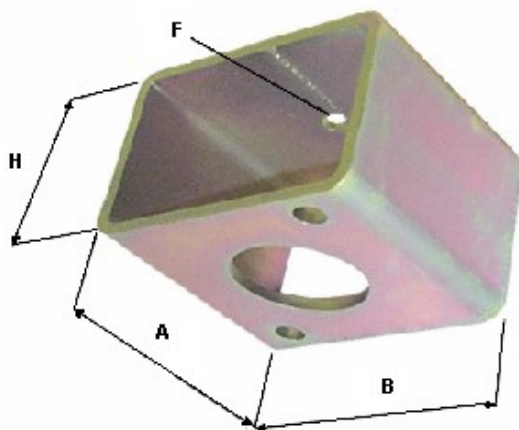

Vibracoustics Ltd Vi-Flex ceiling hangers are simple to assemble and install on site.

Studding is not included as standard but is available separately with nuts and washers.

When ordering Vi-flex hangers quote the mount type followed by the compound reference as shown in the Max Load column. e.g. VS7102 N70.

Part No.	Dimensions (mm)			Insert Used	Max Load (Kg)			Max Static Deflection (mm)
	Bracket A x B x H	Top Fixing Hole Ø 'F' In Bracket	Studding Thread		N45	N60	N70	
VS7101	73x70x70	8.5	M8	VS4102	20	40	*	4.8
VS7102	108x120x120	10.5	M10	VS4104	70	130	170	8.5
VS7103	108x120x80	10.5	M10	VS4104	70	130	170	8.5
VS7104	130x120x120	10.5	M10	VS4105	130	220	320	10
VS7105	130x120x80	10.5	M10	VS4105	130	220	320	10

